


FLANGED FLEXIBLE PUMP CONNECTOR

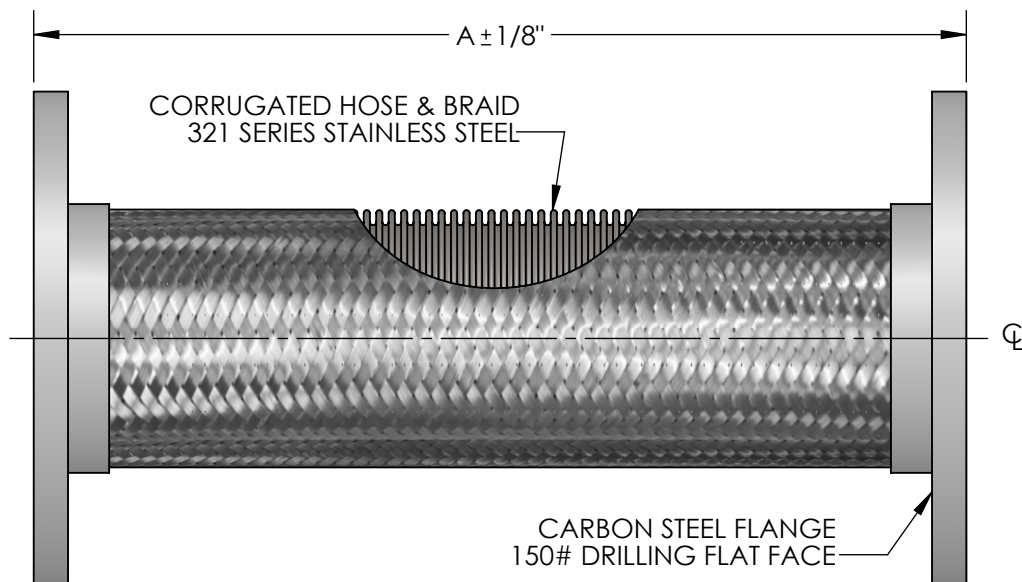

QTY	PART NUMBER	PIPE SIZE		A	PRESSURE RATING (PSI)*	WEIGHT (LBS)	PROJECT INFORMATION
		INCH	MM				
		2"	50	12"	516	12	
		2-1/2"	65	12"	387	13	
		3"	80	14"	316	15	
		4"	100	16"	232	20	
		5"	125	18"	191	30	
		6"	150	20"	165	34	
		8"	200	22"	234	68	
		10"	250	24"	230	75	
		12"	300	26"	161	112	
		14"	350	28"	150	128	

*FOR SAFE WORKING PRESSURE ABOVE 70°F, MULTIPLY THE PRESSURE SHOWN AT 70°F TIMES THE CORRECTION FACTOR OF THE REQUIRED TEMPERATURE.

MAX INTERMITTENT OFFSET FROM CENTERLINE 3/4"
MAX PERMANENT OFFSET FROM CENTERLINE 1"

TEMPERATURE (°F)	FACTOR
70	1.0
200	.91
300	.85
400	.78
500	.77
600	.76

NSF 372 - LEAD FREE

The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content. Not suitable for potable water systems due to materials of construction.

CUSTOMER: _____

PROJECT: _____

ENGINEER: _____

REV.	1	TEMP FACTOR UPDATED	DATE 12/28/2016
		WWW.FLEXPIPEUSA.COM	
MODEL FPFLG-150			
FLANGED FLEXIBLE PUMP CONNECTOR			
DRAWN BY: RB		DATE: 1/10/2018	
APPROVED: QC		DATE: 1/10/2018	
SCALE: N/A		DRAWING NUMBER:	